

NX1 Machine Automation Controller

Continue to pursue productivity



Secure data transfer | Machine control | Safety integration | Traceability | Quality inspection



Improve productivity, improve your business

The manufacturing industry is under pressure to keep boosting productivity without compromising on quality. Global production and flexible production are required to satisfy diverse consumer needs.

In addition, manufacturers need to control quality and enhance safety to meet advanced regulatory requirements. In order to fulfill these requirements, it is crucial to utilize information, take safety measures, control quality, and at the same time improve production efficiency.

Common isues

Customers compromise between production efficiency and information utilization/safety measures/quality control



Production cycle time is increased due to data traceability requirements

Full traceability is required to meet high-level quality standards.



Safety measures make setup and troubleshooting difficult

Separate safety control for machines and lines and separate controllers for machine control and safety are required. Line and machine design is time-consuming, and safety measures have to be redesigned when the layout is changed.



Production lead time is increased due to additional inspections and tight quality control

Adding inspections to maintain quality increases production lead time. When special machines with built-in PC that collect and process data at high speeds are used for inspections, maintenance becomes difficult. Instead, acceptance sampling is conducted offline.

NX1 The next standard



NX1

Improves production efficiency while optimizing information utilization, safety measures, and quality control

Safety

Integrated safety across production line

Information

Real-time traceability

Improve manufacturing productivity

high-speed, high-precision control

Continue to pursue productivity Quality

High-speed in-line inspection

Produce faster without compromising on quality

The NX1 can securely transfer information, take safety measures, and control quality while at the same time improving production efficiency through high-speed, high-precision control.

This contributes to continuous improvement in productivity.





Integrated safety across production line



Safety

The NX1 is the first in the world* to integrate two different open networks: EtherNet/IP™ for scalable safety control in production lines and EtherCAT® for fast, reliable, redundant safety control in machines. Furthermore, it integrates safety control into machine control in lines that require fast cycle times.

This integration allows you to standardize machines and build flexible lines.

* Based on Omron investigation in March 2018.

Improve manufacturing productivity

Quality


High-speed in-line inspection

Although special inspection machines with built-in PC are widely used for high-speed inspections, they require special maintenance skills.

Therefore, acceptance sampling is often carried out offline to prevent line stoppages. The NX1 can be used in conjunction with the High-speed Analog Input Unit to collect measurement data within a fixed cycle time of 5 μ s. This standard controller eliminates the need for special machines with PC and can be maintained by on-site engineers. Inline inspections of all products can also be conducted easily.


High-speed in-line inspection of all products with standard inspection machine



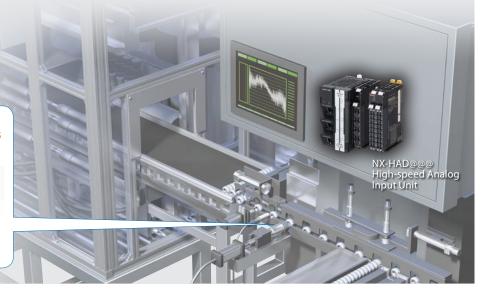

Seamless integration: production line & IT systems

The NX1 Controller integrates inputs, logic, outputs, safety, and robotics, offering a wide variety of applications that leverage information to boost productivity and measures for quality and safety.

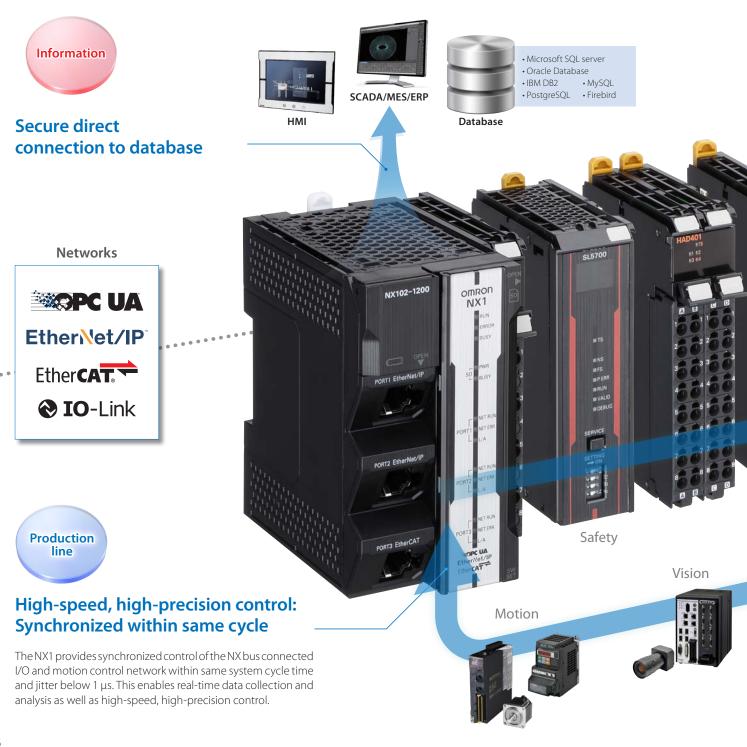

Information utilization application

Application	NX1 functionality + product			
All traceability data storage				
Linua	NX1 Database Connection CPU Unit Code reader RFID			
Direct connection of machine to MES/SCADA	NV1 ODC IIA annung (atom desid for estimation)			
Data utilization to prevent manipulation	NX1 OPC UA server (standard functionality)			
Linkage between image and data	FH Vision System			



Sensing

Production efficiency improvement application

Application	NX1 + product			
Predictive maintenance	NX-ILM400 IO-Link Master Unit IO-Link sensor			
Automatically optimized temperature control	NX-TC@@@@ Temperature Control Unit E5@D Digital Temperature Controller			
Position and load control for servo press	1S Servo System			
Weighing control	NX-RS@@@@ Load Cell Input Unit			
Fracer control	ZW-7000/5000 Confocal Fiber Displacement Sensor			

Quality control application

Rotator inspec	tion	NV 1100 115 1			
Welding qualit	y inspection	NX-HAD@@@ High-speed Analog Input Unit			
Appearance inspection	0	FH Vision System			

Safety measures application

High-speed safety control in machine	NX-SL5@00 Safety CPU Unit		
Safety control in line	The state of the s		
Intrusion detection	F3SG-R Safety Light Curtain		

NX1 brings advanced control in miniaturized size

Three industrial Ethernet ports and a power supply are housed in a compact design with a width of 66 mm. The NX1 provides key functionality to integrate control and information for advanced manufacturing applications. The new controller contributes to the pursuit of productivity improvements.



High-speed, high-precision control

Synchronized control of I/O and motion within 1 ms cycle time

Jitter : 1 μs

Memory capacity for variables: 33.5 MB*1

Redundancy to minimize downtime (NX102-000)

Even if a part of the EtherCAT network is disconnected, Cable Redundancy provides continuous connectivity. This function allows you to fix disconnection without stopping the machines and production line where one controller provides both machine control and safety control.





Multicore microprocessor for control and data handling

The multicore microprocessor enables information utilization including communications and traceability without compromising control performance.

Secure host connection

OPC UA is an IEC communication protocol which is listed as a recommendation for Industrie 4.0 and PackML. The NX1 comes equipped with an OPC UA server interface and provides a secure connection to IT systems such as MES and ERP.



Enhanced Ethernet functionality

Connectivity to existing devices (e.g., Modbus/TCP*², FINS communications, and connection to other vendor PLC*³) and EtherNet/ IP^{TM} performance (increased to 12,000 pps*⁴) are improved. Packet Filter enhances security, and visualization of EtherCAT® slave errors makes troubleshooting easier.

^{*1.} The total number of bytes of retained and non-retained variables

^{*2.} Clients instructions are supported.

 $^{^{*}}$ 3. SLMP commands are included in the Sysmac Library.

^{*4.} The total pps of two ports.

One software for easy integration & simulation


Sysmac Studio – Integrated Development Environment integrates programming, configuration, information, and safety.

The project version control system in the Sysmac Studio Team

Development Option ensures smooth development across the team.

The Sysmac Studio includes Function Blocks for motion control and database connection, and collections of software functional components Sysmac Libraries can be downloaded from our website. These allow you to minimize time to build systems that boost productivity.



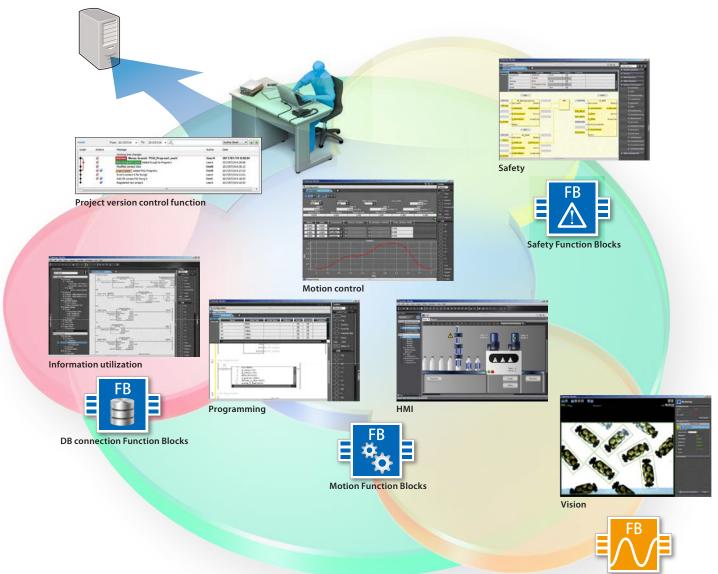



Ordering Information

International Standards

The standards are abbreviated as follows: U: UL, U1: UL(Class I Division 2 Products for Hazardous Locations), C: CSA, UC: cULus, UC1: cULus (Class I Division 2 Products for Hazardous Locations), CU: cUL, N: NK, L: Lloyd, CE: EU Directives, RCM: Regulatory Compliance Mark and KC: KC Registration. Contact your OMRON representative for further details and applicable conditions for these standards.

NX-Series NX102 CPU Units

Product Name		Memory capacity for	Maxin	num number of use	Model	Standards	
		variables		Motion control axes	Single-axis position control axes	model	
NX102			12	8	4	NX102-1200	
CPU Unit			8	4	4	NX102-1100	
B *			6	2	4	NX102-1000	
	5.110	1.5 MB (Retained during power interruption)/	4	0	4	NX102-9000	UC, CE,
NX102	5 MB	22.445	12	8	4	NX102-1220	RCM,
Database Connection		32 MB	8	4	4	NX102-1120	KC
CPU Unit		(Not retained during	6	2	4	NX102-1020]
		power interruption)	4	0	4	NX102-9020	

Automation Software Sysmac Studio

Please purchase a DVD and required number of licenses the first time you purchase the Sysmac Studio. DVDs and licenses are available individually. Each model of licenses does not include any DVD.

Product Name	Specifications	Number of licenses	Media	Model
	The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including the NJ/NX-series CPU Units, NY-series Industrial PC, EtherCAT	 (Media only)	DVD	SYSMAC-SE200D
Sysmac Studio Standard Edition Ver.1.□□	Slave, and the HMI. Sysmac Studio runs on the following OS. Windows 7 (32-bit/64-bit version)/ Windows 8 (32-bit/64-bit version)/ Windows 8.1 (32-bit/64-bit version)/ Windows 10 (32-bit/64-bit version) The Sysmac Studio Standard Edition DVD includes Support Software to set up EtherNet/IP Units, DeviceNet slaves, Serial Communications Units, and Support Software for creating screens on HMIs (CXDesigner). For details, refer to your local OMRON website.	1 license *1		SYSMAC-SE201L

*1. Multi licenses are available for the Sysmac Studio (3, 10, 30, or 50 licenses). Note. For Sysmac Studio Team Development Option, refer to your local OMRON website.

Collection of software functional components Sysmac Library

Please download the Sysmac Library from the following URL and add it to the Sysmac Studio. http://www.ia.omron.com/sysmac_library/

Product name	Model	
SLMP Communications Library	The SLMP Communications Library is used to control communications with Mitsubishi sequencers using the SLMP communications protocol.	SYSMAC-XR017
High-Speed Analog Inspection Library	The High-speed Analog Inspection Library records analog input values acquired by the High- speed Analog Input Units in time.	SYSMAC-XR016

High-speed Analog Input Unit

		Specifications					
Product name	Number of points	Number of points Input range		Conversion time	Trigger input section		Model
	Number of points				Number of points	Internal I/O common	
High-speed Analog Input Unit	4	-10 to +10 V -5 to +5 V	1 to 5 V 0 to 20 mA	5/4 Ch	4	NPN	NX-HAD401
	4 points	0 to 10 V 0 to 5 V	4 to 20 mA	5 μs/4 Ch	4 points	PNP	NX-HAD402

Safety CPU Unit

Product name	Maximum number of safety I/O points	Program capacity	Number of safety master connections	I/O refreshing method	Model
Safety CPU Unit	1024 points	2048 kB	128	Free Dun vefreeking	NX-SL5500
	2032 points	4096 kB	254	Free-Run refreshing	NX-SL5700



OMRON AUTOMATION AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

Authorized Distributor:

Controllers & I/O

- Machine Automation Controllers (MAC) Motion Controllers
- Programmable Logic Controllers (PLC) Temperature Controllers Remote I/O

Robotics

• Industrial Robots • Mobile Robots

Operator Interfaces

• Human Machine Interface (HMI)

Motion & Drives

- Machine Automation Controllers (MAC) Motion Controllers Servo Systems
- $\bullet \ \mathsf{Frequency} \ \mathsf{Inverters}$

Vision, Measurement & Identification

 $\bullet \ Vision \ Sensors \ \& \ Systems \ \bullet \ Measurement \ Sensors \ \bullet \ Auto \ Identification \ Systems$

Sensing

- Photoelectric Sensors Fiber-Optic Sensors Proximity Sensors
- Rotary Encoders Ultrasonic Sensors

Safety

- Safety Light Curtains Safety Laser Scanners Programmable Safety Systems
- Safety Mats and Edges Safety Door Switches Emergency Stop Devices
- Safety Switches & Operator Controls Safety Monitoring/Force-guided Relays

Control Components

- Power Supplies Timers Counters Programmable Relays
- Digital Panel Meters Monitoring Products

Switches & Relays

- Limit Switches Pushbutton Switches Electromechanical Relays
- Solid State Relays

Software

• Programming & Configuration • Runtime

F202I-E-02

Note: Specifications are subject to change.

© 2018 Omron. All Rights Reserved.

Printed in U.S.A.